

PowerOn fitting instructions for Parmaker walk behind buggy

WARNING : PLEASE READ CAREFULLY - It is highly recommended that you visit one of our PowerOn Service Centres to carry out the following procedure, as failure to carry out these instructions exactly, may cause damage to your new PowerOn Lithium Battery, your Parmaker Golf Buggy, or personal injury.

To find your nearest PowerOn Service Centre, visit our Website – www.powerongolf.com.au and click on the customer care tab.

1/ To begin – Remove your original Parmaker Battery from the buggy and remove the original Parmaker Battery Leads.

2/ With the Battery removed from the battery tray, you will now see 4 Battery Locating Lugs, as indicated by yellow arrows in figure no 1 below.



Figure No 1

3/ Tilt the Buggy up so that you can see the Bottom of the Battery Tray as per figure No 2 below.

4/ Remove the two front Battery Locating Lugs from the Battery Tray, as indicated by yellow arrows in Figure No 2 Below. This is best achieved by gently tapping on the bottom of the Locating Lugs, until they are free from the Battery Tray.

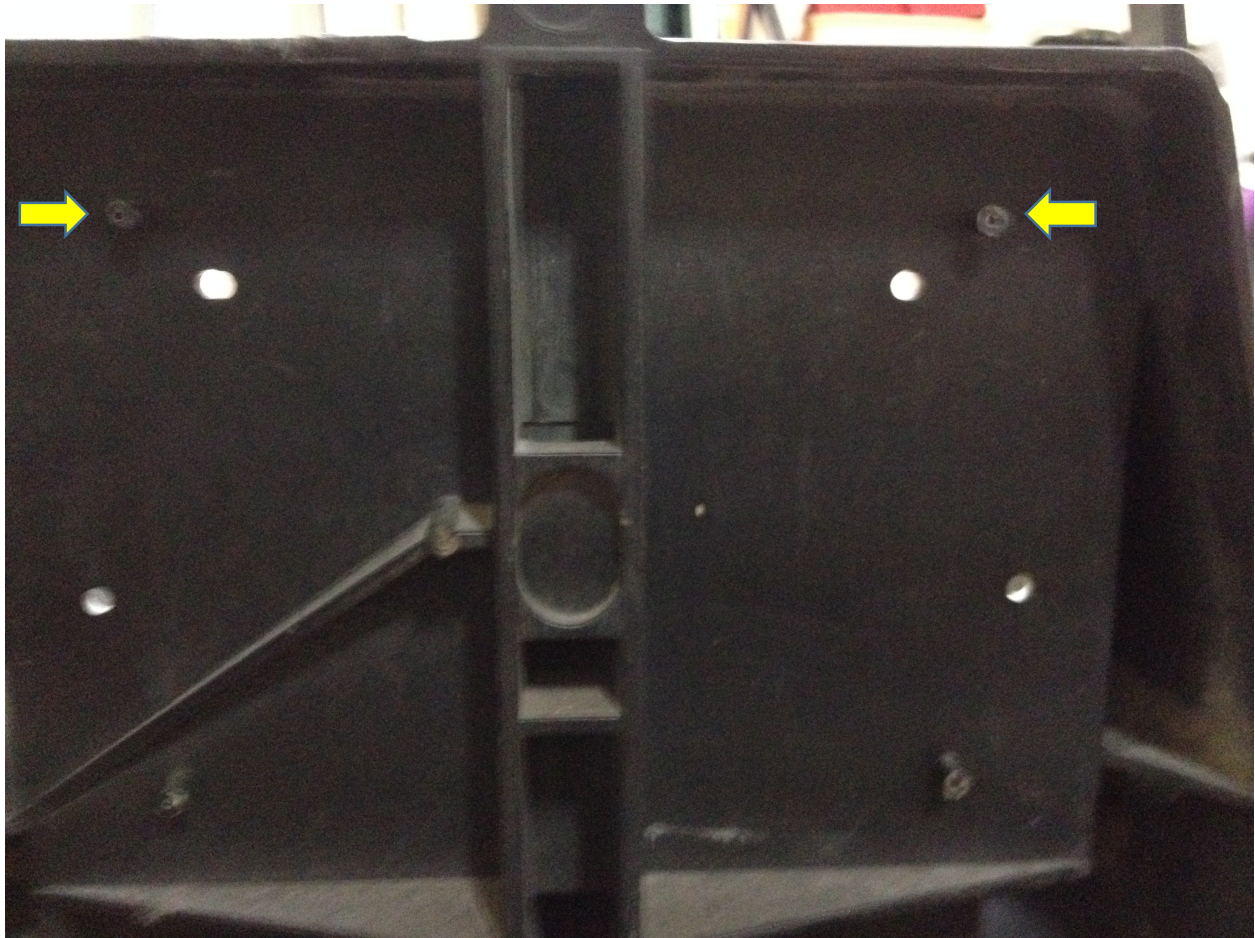


Figure No 2

5/ Now tilt the buggy back into the upright position and gently tap the two locating lugs (that you have already removed) into the holes indicated by yellow arrows on figure No 3 below.

6/ The Battery Tray with the Battery Locating Lugs should now look like Figure No 3 Below.

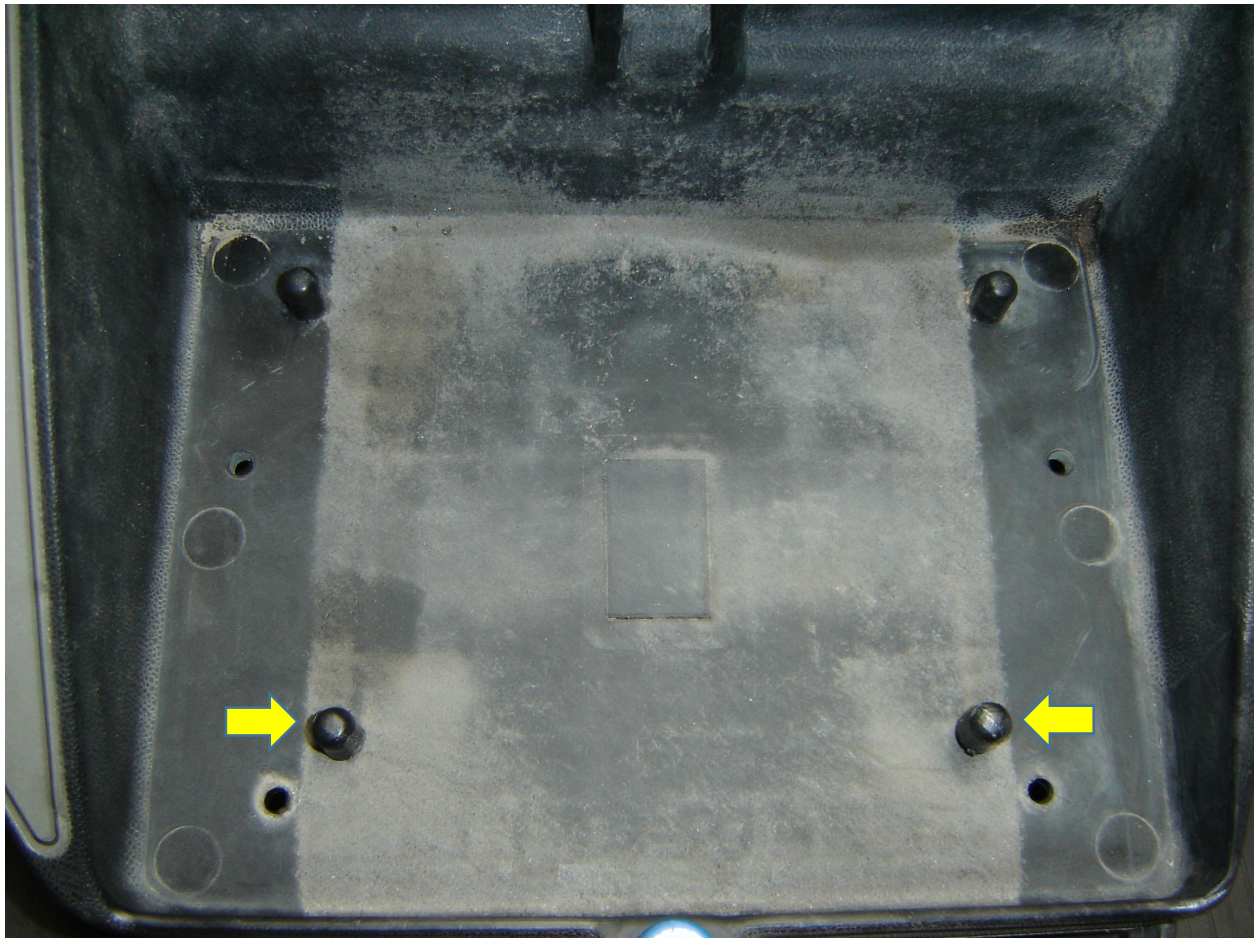


Figure No 3

7/ Remove your new PowerOn Battery from the Box and position it with the Battery Terminals closest to you as per Figure No 4 below.

8/ With the Battery positioned as per Figure No 4 below, remove the two Black Plastic Caps protecting the Battery Lead attaching Bolts as per Figure No 4 Below.



Figure No 4

9/ Remove the two bolts which will be used to attach the Battery Leads to the Battery.

As per Figure No 5 below.



Figure No 5

10/ Attach the original Parmaker Battery Lead (that you have previously removed from your old battery) onto the new PowerOn Battery, exactly as per figure No 6 below. Please take note of the positioning of the spring and flat washers, as indicated by the yellow arrow on Figure No 6 below.



Figure No 6

11/Once the Battery Leads have been connected to the Battery, please ensure the Battery Lead connecting bolts are tight, using a 10 millimetre spanner or socket, as per Figure No 7 below.

12/ Your Battery should now look exactly as per Figure No 7 below, with the Red (positive) Lead and the Black (negative) Lead as per Figure No 7 below.

WARNING – PLEASE ENSURE THAT YOUR RED BATTERY LEAD IS CONNECTED DIRECTLY ADJACENT TO THE RED DOT ON THE BATTERY AND IS FITTED EXACTLY AS PER FIGURE NO 7 BELOW.

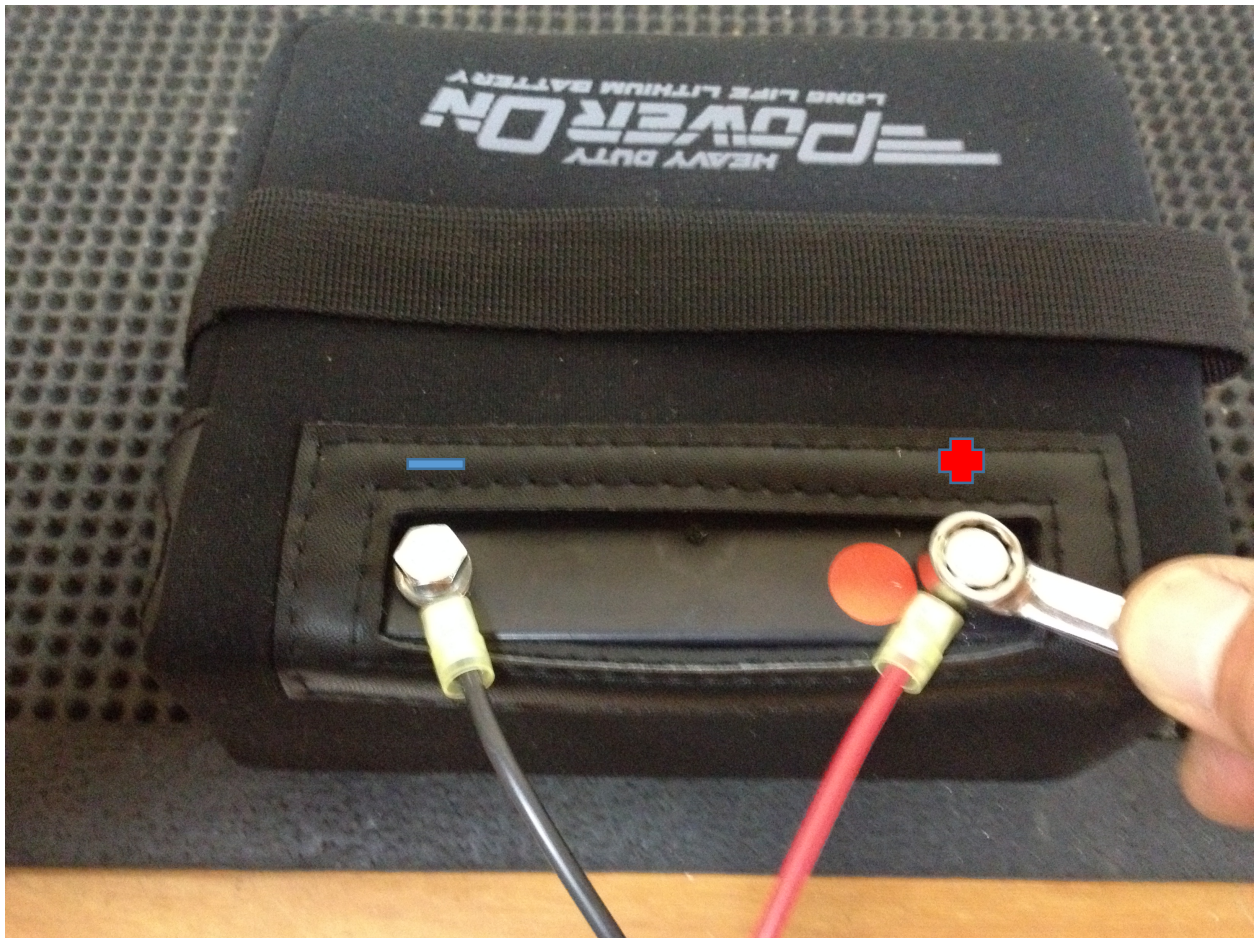


Figure No 7

13/ Refit the Black Plastic Protective Caps to the Battery Lead securing bolts as per Figure No 8 below. Please ensure that the Black Plastic Caps are securely fitted before proceeding any further and the best way to achieve this, is by pushing firmly down on the top of the caps or GENTLY tapping on the top of the caps, as per figure No 8 Below.



Figure No 8

14/ Fit your new Poweron Battery into the Battery Tray as per Figure No 9 below. Please take note of the Battery Positioning Lugs, as indicated by yellow arrows in Figure No 9 below.

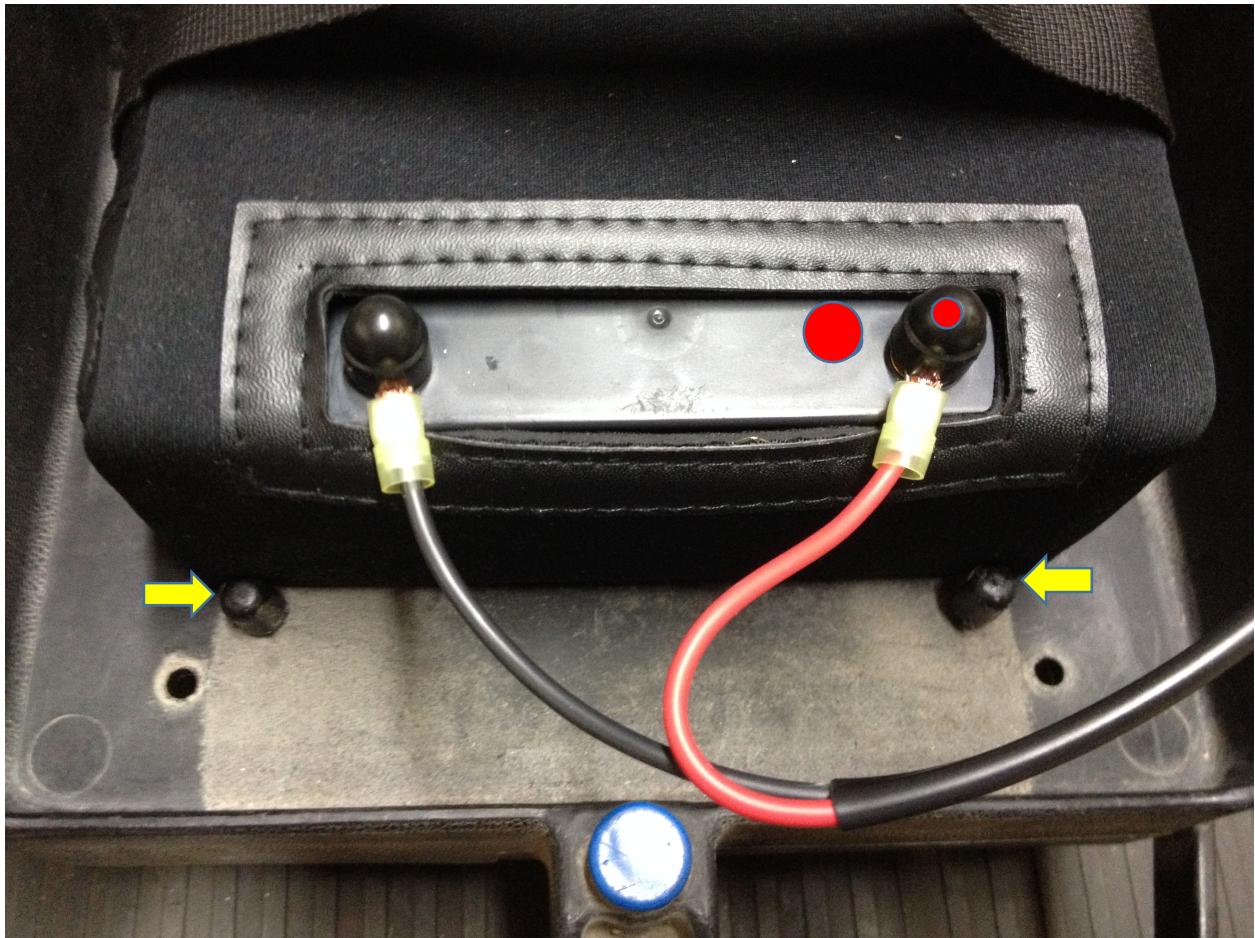


Figure No 9

15/ Now connect the Battery Leads to the buggy as per Figure no 10 below and you are ready to begin using your new PowerOn Lithium Battery.

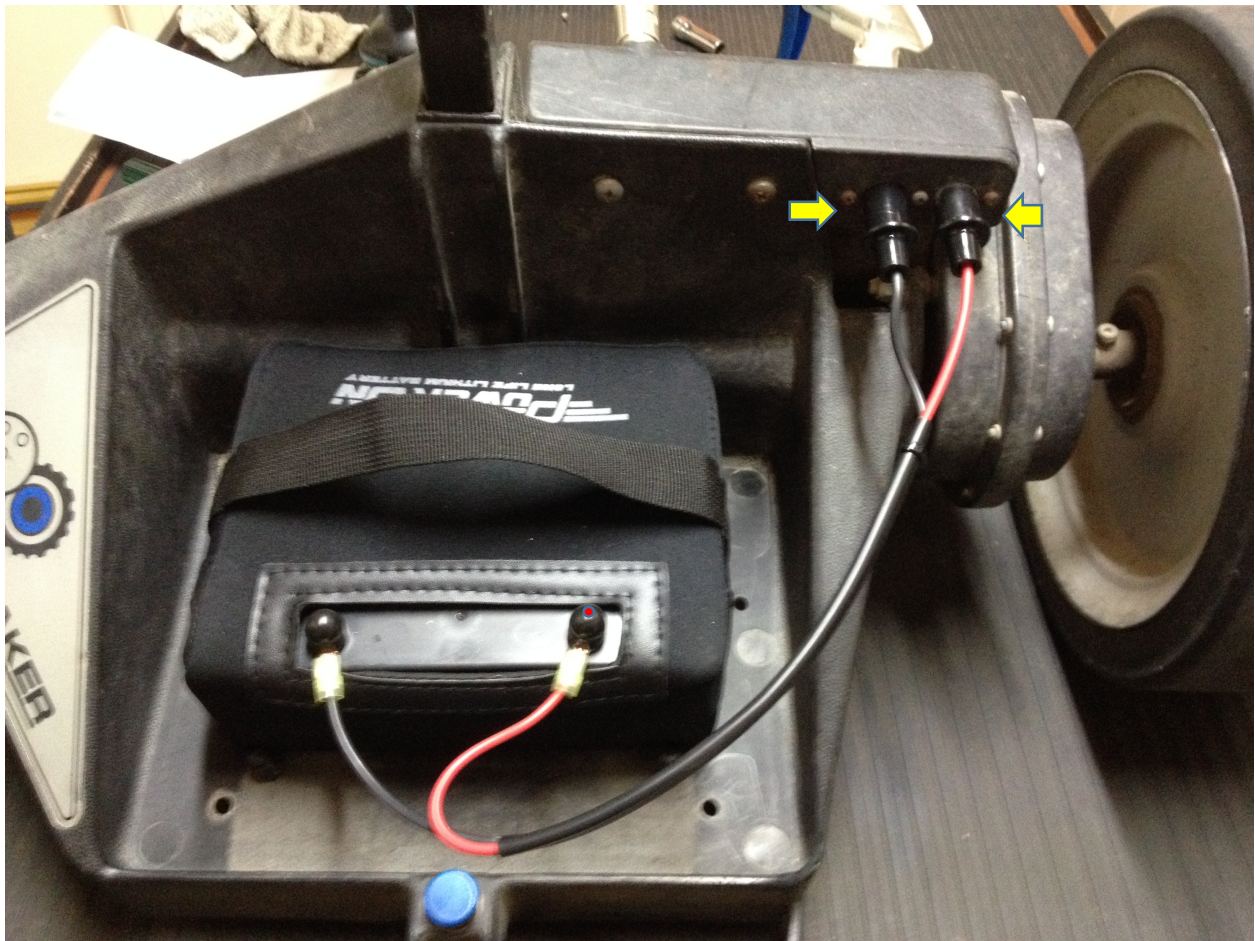


Figure No 10